

SMARTWORKS™ HPX

CALL RECORDING FOR IP PBXs


Standard Features for SmartWORKS™ HPX

- Eliminates need for hardware
- Multiple PBX/Protocol Support
- Runs without a PCI slot
- Flexible Event Triggering
- RTP Forwarding



Since 1991, Ai-Logix has designed boards used in interactive and passive telephony applications. With global support for all types of telephone and radio systems - analog, digital, and enterprise PBXs, Ai-Logix products have set a new world standard in telephony communications. A single API, combined with event driven reporting simplifies application development by providing one standard for all types of networks.

SmartWORKS™ HPX is an essential component of your call recording solution that provides packet filtering and media forwarding for IP-PBXs. The HPX is designed to service low to medium density solutions and is capable of monitoring and forwarding 480 concurrently active calls. When combined with the HPXMedia, the HPX provides complete event triggering, call state reporting and media processing for many of the industry leading IP-PBXs.

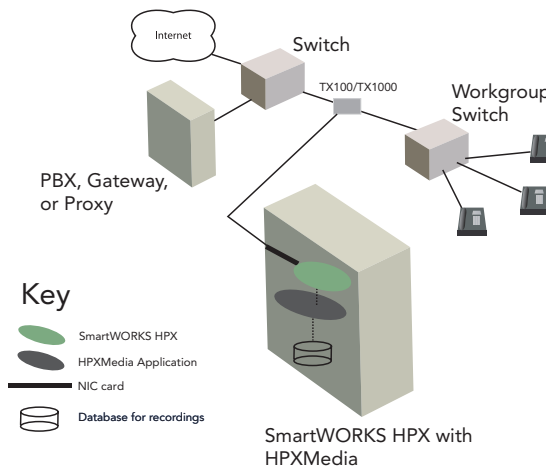

Key Features and Benefits

Tapping Environment

The HPX is the first software only SmartWORKS™ blade. The host computer's NIC card can be connected directly to an available mirror port. When used in conjunction with a TX100/TX1000, it can be connected passively anywhere within the IP-PBX configuration.

Session Management

The HPX includes a Session Manager for tracking calls and media sessions on the IP network. Each media session is treated independently with a unique session ID. Your application can easily manage call forwarding with the session IDs provided by the HPX software using the SmartWORKS™ API.

Station Management

Automatically locates all VoIP stations on the network and assigns a unique ID to each endpoint. HPX dynamically identifies phones as they are added to the network and reports when they are removed.

Product features

- Uses SmartWORKS™ API
- Supports 10/100/1000 network interfaces
- Decodes proprietary VoIP signaling as well as standard SIP and H.323
- Scalable - 1 to N Sessions support per server. 480 session support tested and certified. HPX performance limited by Server capabilities and Network bandwidth. It may be possible to exceed 480 sessions

U.S.A

Somerset, NJ · 08873
T: +1-732-469-0880

ASIA

Shanghai, China
Tel +86-21-5358-0108

www.ai-logix.com.cn

HARDWARE SYSTEM REQUIREMENTS

Pentium 4 or equivalent · 3 GHz CPU , 1 Gig RAM or better for 100 conversations ·

OPERATING SYSTEMS

Windows2000 Professional/Server, Windows XP Professional (SP3), Windows7 (32-bit/64-bit), Windows2003 server (32-bit/64-bit), Window2008 server (32-bit/64-bit), Linux (Call for variant details)

VOIP PROTOCOLS

Cisco Call Manager (Skinny)
Avaya Office Manager (H.323) , IP Office
Ericsson (H.323)
Nortel (Unistem/SIP)
SIP (Station Side/ Trunk Side)
H.323 (Station Side/ Trunk Side)
Alcatel OmniPCX 4400
Siemens Hi-Path 4000
Intertel CS-5200
NEC NEAX 2400
ShoreTel (VOX only)
and more.

RTP FORWARDING

Certified for forwarding 300 full duplex media sessions

APPLICATION PERFORMANCE

Capacity to monitor from 1 to N active VoIP endpoints limited by license. Certified for 480 Monitoring and Forwarding HPX performance limited by Server capabilities and Network bandwidth. It may be possible to exceed 480 sessions

MODELS AVAILABLE

SmartWORKS™ HPX
SmartWORKS™ HPXMedia
TX100/TX1000